

# ControlSpace® EX-UH endpoint

## Product Description

The ControlSpace® EX-UH is a convenient, cost-effective Dante™-based endpoint for BYOD devices and telephone handsets. Using a single CAT 5/6 cable, the EX-UH is optimized for use with ControlSpace EX-1280C conferencing processors. Whether used to connect a laptop running a soft-codec or to connect a customer's handset for bridging calls, or both, the EX-UH simplifies design, improves audio quality and provides solutions where cabling options are limited.



## Key Features

- **One-cable-from-the table connectivity** supports PoE and Dante audio networking to maximize ease of integration
- **Dante™ audio networking** for connection to other Dante-enabled products over Ethernet-based networks.
- **USB 2.0 connector** supports PC connections to soft codecs such as Skype for Business™
- **Headset connectors** for direct connection to office and mobile phones through RJ-9 and 3.5 mm TRRS ports
- **Daisy-chainable power output** allows multiple EX endpoints to be powered through one external power supply
- **Rotatable mounting tabs** allow for multiple mounting options
- **Low-profile aluminum enclosure** with integrated LED indicators for unobtrusive under-table mounting
- **Simplified software configuration** via ControlSpace Designer software. Supports autodiscovery, auto-routing, and logic presets for microphone LEDs and pushbuttons
- **Optional magnetic mounting plate** for single-handed under-table mounting

## Applications

Designed for a wide range of applications, including:

- Boardrooms
- Medium/large conference rooms
- Courtrooms
- Distance learning
- Auditoriums
- Multi-purpose spaces

# ControlSpace® EX-UH endpoint



## Technical Specifications

COMMUNICATION PORTS	
USB Audio	USB v2.0, Micro-B type, class-compliant (no drivers required), 2-ch in/2-ch output
Telephone Headset	RJ-9 (1 in x 1 out) and 3.5 mm TRRS (1 in, 2 out)


AUDIO OVER IP	
Dante™ Audio Networking	64 x 64, primary/secondary, gigabit

POWER	
PoE Class	Class 0 802.3af PoE PD compliant
External Connectors	(1) 3.81 mm Euroblock connector, 2-pin, (1) 5.5 mm barrel with positive center
External Power Range	24 VDC, daisy-chainable
Power Consumption	5 watts

SOFTWARE APPLICATION	
ControlSpace Designer software version 5.0 or later	

GENERAL	
LED Status Indicators	Power, two (2) tri-color signal status for USB and headset
Frequency Response	20 Hz – 20 kHz, ± 1 dB
Digital Conversion	24 kHz / 24-bit
Certifications	FCC Part 15 Class A, CE (EN 55022 Class A)
Operating Temperature	32° F – 104° F (0° C – 40° C)
Product Code	075256

## Front Panel

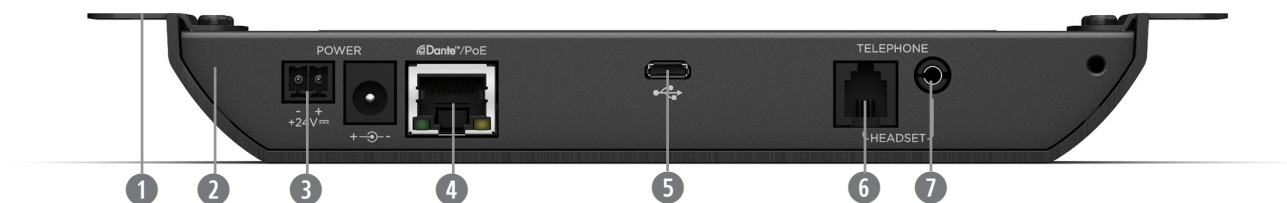

- 1 **Rotatable Mounting Tabs** - Multiple mounting options
- 2 **Rugged Metal Enclosure** - Sleek and unobtrusive for under-table use
- 3 **+24V DC Connectors** - Externally supply DC power
- 4 **Gigabit Network Port** - Supports PoE, Dante and ControlSpace control
- 5 **+Micro-B USB 2.0** - For PC soft codec connections
- 6 **RJ-9 Input** - 5Connects with telephone handsets
- 7 **3.5mm TRRS Analog Audio** - For laptops and mobile phones

# ControlSpace® EX-UH endpoint



## Rear Panel





- 1 **Dante/Network Connector** - Daisy-chainable Dante or convenient service port
- 2 **Daisy-Chainable Power Output** - Allows multiple units to be powered via external power supply


## Mechanical Diagrams



Top View

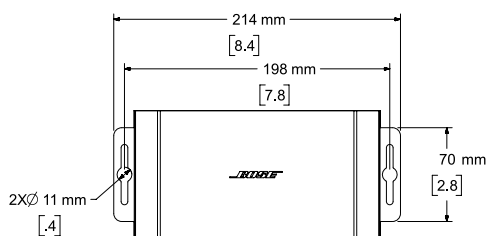


Front View



Right View

DIMENSIONS APPLY TO BOTH SIDES

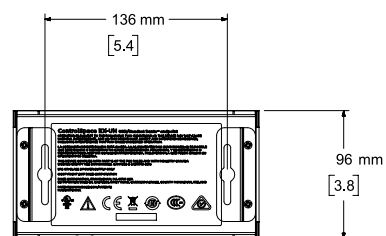

Rear View