


RoomMatch® Utility Fill/Foreground Loudspeakers

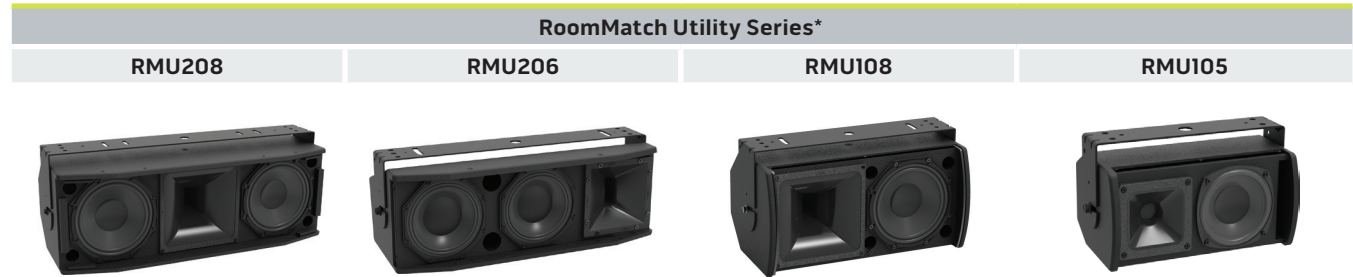

System Performance

Frequency Response (+/-3 dB) (1)	80 – 16 kHz	90 – 16 kHz	90 – 16 kHz	100 – 16 kHz
Frequency Range (-10 dB)	70 – 16 kHz	80 – 16 kHz	80 – 16 kHz	90 – 16 kHz
Coverage Pattern	90°x 60° (rotatable)	120°x 60° (rotatable)	90°x 60° (rotatable)	100°x 100°
Long-Term Power Handling (2)	400 W	300 W	250 W	150 W
Calculated Maximum SPL @ 1 m, peak (3)	128 dB	123 dB	123 dB	118 dB

Transducers

Low Frequency	2 x Bose 8-inch woofer	2 x Bose 6.5-inch woofer	1 x Bose 8-inch woofer	1 x Bose 5.25-inch woofer
High Frequency	1 x Bose EMB2 compression driver			
Nominal Impedance	8 Ω (70/100V optional)			

Physical

Dimensions (H x W x D), inches (mm)	9.3" x 27.0" x 10.5" (236 x 686 x 267 mm)	7.0" x 19.0" x 9.0" (178 x 483 x 229 mm)	9.3" x 18.5" x 10.5" (236 x 470 x 267 mm)	6.0" x 12.0" x 7.5" (152 x 305 x 191 mm)
Net Weight	37 lbs (16.8 kg)	25 lbs (11.3 kg)	21 lbs (9.5 kg)	12 lbs (5.4 kg)
Net Weight with U-Bracket	43 lbs (19.5 kg)	29 lbs (13.2 kg)	26 lbs (11.8 kg)	15 lbs (6.8 kg)
Finish Color	Black or White			
Environmental Rating	Indoor			

Notes:

1. Frequency response and range measured on-axis, in an anechoic environment, with recommended high-pass filters.
2. Power handling using AES standard 2-hour duration with IEC system noise.
3. Maximum SPL calculated from sensitivity (acoustic half-space) and power handling specifications, exclusive of power compression.

BOSE PROFESSIONAL

pro.Bose.com

For additional specifications and application information, please visit pro.Bose.com. Specifications subject to change without notice. *Images not to scale. CC015627