



FreeSpace FS4SE Surface-mount Loudspeaker

EN 54-24 Certified Ratings


EN 54-24: 2008, Loudspeaker for Voice Alarm Systems for Fire Detection and Fire Alarm Systems for Buildings

EN 54-24 Certified Ratings ¹						
Frequency Range	100 Hz to 10 kHz					
Sensitivity (1 W @ 4 m)	75.0 dB					
Measured Max. SPL @ 4 m	88.2 dB					
Coverage Angle Octave Band	500 Hz	1000 Hz	2000 Hz	4000 Hz		
Horizontal Coverage	360°	155°	120°	95°		
Vertical Coverage	360°	155°	115°	80°		
Rated Impedance		2.5W	5W	10W	20W	40W
	70V	1960 Ω	980 Ω	490 Ω	245 Ω	123 Ω
	100V	—	2000 Ω	1000 Ω	500 Ω	250 Ω
Passive Nominal Impedance	8 Ω					
Rated Noise Power	40W					

Footnotes

- The specifications data was measured in an anechoic chamber, free-field. Reference plane is on the grille surface and perpendicular to the reference axis. Reference axis is perpendicular to center of grille surface. Horizontal plane is containing the reference axis and perpendicular to the reference plane.

On-axis Frequency Response

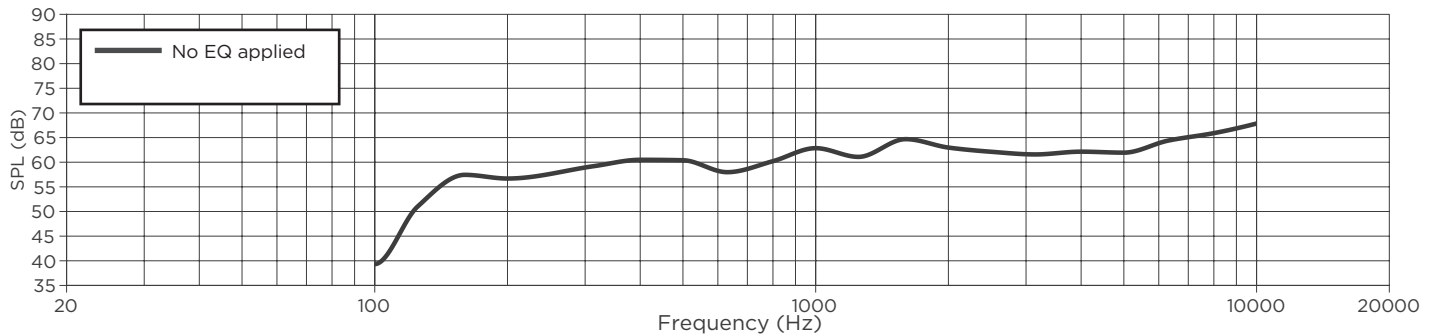

©2020 Bose Corporation, All rights reserved.
 Framingham, MA 01701-9168 USA
 PRO.BOSE.COM
 AM857615 Rev. 00
 June 2020

